




information@hydrasearch.com  
+1.410.643.8900

## EF-SS1488A-0604 – End Fittings – Straight – S.A.E. 37° Female Flare (J.I.C.) to Hose

SKU: EF-SS1488A-0604

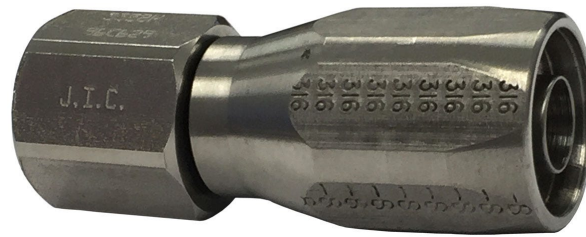

### Description

- Equal to Aeroquip P/N 10-411 & 259-411 Use with the following hose: Synthetic yarn and wire reinforced hoses i.a.w. MIL-DTL-24136/3, MIL-DTL-24135/10/12, e.g. HS P/N 2580
- Following Hose: ER512 & 2580

### Specification Table

|                               |                                                                                        |
|-------------------------------|----------------------------------------------------------------------------------------|
| pa_applicable-hoses           | Synthetic yarn and wire reinforced hoses in accordance with MIL-DTL-24136/3            |
| pa_component-1                | Required per Assembly – 1 Description – Nipple B18978-3 Material – 316 Stainless Steel |
| pa_component-2                | Required per Assembly – 1 Description – Socket C18984-3 Material – 316 Stainless Steel |
| pa_component-3                | Required per Assembly – 1 Description – Nut B18972-3 Material – 316 Stainless Steel    |
| pa_dim-a-hex-in               | '4.34                                                                                  |
| pa_dim-c-id-in                | -                                                                                      |
| pa_dim-d                      | '2.28                                                                                  |
| pa_dim-e-hex                  | '0.82                                                                                  |
| equal_to_aeroquip_no          | '41-190885-1-16                                                                        |
| estimated_weight_per_ft_lbs   | '2.78                                                                                  |
| drawing_number                | C20356                                                                                 |
| ips_size                      | '1                                                                                     |
| thread_size_t_br_thread_cl_3a | '2-5/16"-12                                                                            |