


6GN309 – Female Union x Female Union

SKU: 6GN309

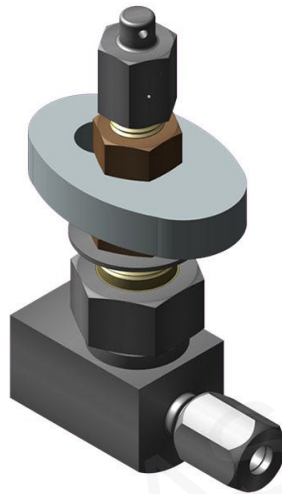

Description

- Basic valve configuration works with MIL-DTL-24578. Working pressure is 6000 PSI.

Specification Table

application	High Corrosion Resistant (Monel) – Hydraulic (System Fluid) High Corrosion Resistant (Monel) – Wog (System Fluid) Non-Magnetic (Stainless Steel) – Wog (System Fluid) Standard (Stain
pa_body-type	Inline
pa_inlet-connection	7/16"-20 Female Straight Thread
pa_outlet-connection	1/4" Od Flareless With Ferrule & Nut
pa_references	Technical Products Valves Instrumentation & Adapters Valve Information (Catalog 1220).Pdf
pa_type-1	Needle
pa_working-pressure-psi	6
pa_notes	Additional Configurations Are Available For Special Applications Please Contact Our Sales Department With Your Requirements.