


EF-LFS-48 – End Fittings – Straight – Hose to Hose (150 Lb. Flange per MIL-PRF-20042)

SKU: EF-LFS-48

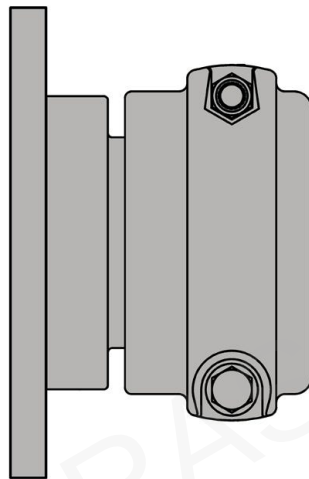

Description

- Use with the following hose: Polyester reinforced polyurethane hose P/N HSSA

Specification Table

pa_applicable-hoses	Polyester reinforced polyurethane hose P/N HSSA
pa_component-1	Required per Assembly – 1 Description – Swivel Flange C17933 Material – Aluminum Bronze in accordance with MIL-B-24480 C95800
pa_component-2	Description – Nipple Required per Assembly – 1 C18298 Material – Aluminum Bronze in accordance with MIL-B-24480 C95800
pa_component-3	Required per Assembly – 2 Description – Segment D18261 Material – Aluminum Bronze in accordance with MIL-B-24480 C95800
pa_component-4	Description – Bolt B17673-1-MP Required per Assembly – 2 Material – Monel in accordance with QQ-N-286
pa_component-5	Description – Nut B18176-MP Required per Assembly – 2 Material – Monel in accordance with QQ-N-281
component_pa_component-6	Description – Washer B18175-MP Required per Assembly – 2 Material – Monel in accordance with QQ-N-281
pa_component-6a	C18278-4 Description – Gasket Required per Assembly – 1 Material – Buna-N

h	'1/2
j	'2.62
a	'4.41
b	'5.50
c	'3.810
d	'2
e	'6.62
f	'5.50
g	'0.56
pa_approx-weight-per-in-lbs	13
drawing_number	C18278
ips_size	'3
pa_no-of-bolts	'8