


## 90EF-1488B4-0816 – End Fittings – 90° – Flange to Hose (MIL-DTL-24787/1, Type FL, Group VIII, Class V, 150 Lb. Flange per A.N.S.I. B16.5)

SKU: 90EF-1488B4-0816

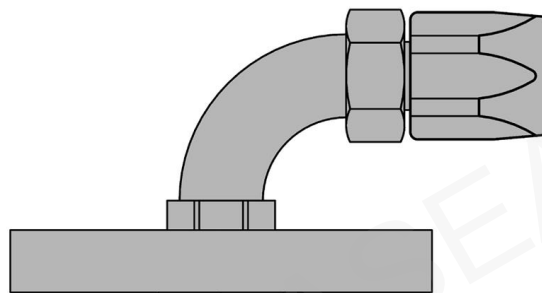

### Description

- Mil Number: MIL-DTL-24787/1
- Following Hose: Synthetic yarn and wire reinforced hoses i.a.w. MIL-DTL-24136/3, MIL-DTL-24135/10/12, e.g. HS P/N 2580

### Specification Table

|                     |                                                                                                                      |
|---------------------|----------------------------------------------------------------------------------------------------------------------|
| pa_applicable-hoses | Synthetic yarn and wire reinforced hoses in accordance with MIL-DTL-24136/3                                          |
| pa_component-1      | Required per Assembly – 1 Description – Elbow Assembly Material – Monel/Cuni C19094                                  |
| pa_component-2      | Required per Assembly – 1 Description – Socket C18667-2 Material – Monel in accordance with QQ-N-281                 |
| pa_component-3      | Required per Assembly – 1 Description – Flange C18803 Material – Aluminum Bronze in accordance with ASTM B505 C95400 |
| h                   | '2.62                                                                                                                |
| j                   | '3.50                                                                                                                |
| l                   | '2.38                                                                                                                |
| m                   | '0.62                                                                                                                |

|                         |                 |
|-------------------------|-----------------|
| <b>n</b>                | '0.36           |
| <b>r</b>                | '1.50           |
| <b>a</b>                | '3.93           |
| <b>c</b>                | '1.44           |
| <b>d</b>                | '2.66           |
| <b>g</b>                | '1.38           |
| <b>est_wt_lbs</b>       | 1.9             |
| <b>drawing_number</b>   | C19570          |
| <b>ips_size</b>         | '1/2            |
| <b>pa_mil-spec</b>      | MIL-DTL-24787/1 |
| <b>no_of_bolt_holes</b> | 4               |

HYDRASEARCH